


## CH097060GTS

### Electrical Characteristics

| Material      | Permeability<br>( $\mu$ ) | AL $\pm$ 8%<br>(nH/N <sup>2</sup> ) | DCB (% min)<br>@ 100 Oe | Coreloss (mW/cm <sup>2</sup> , max)<br>@50kHz, 1000G |
|---------------|---------------------------|-------------------------------------|-------------------------|------------------------------------------------------|
| High Flux GTS | 60                        | 32                                  | 80.08                   | 130                                                  |

OD : 097G

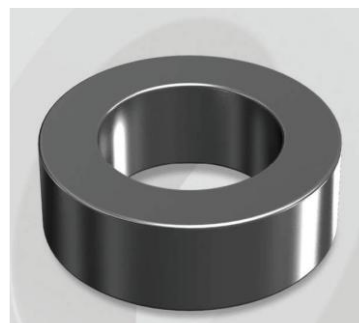

### Core Dimensions

| Dimensions |       | Uncoated<br>(Before) |        | Coated<br>(After) |        | Color | Packaging             |
|------------|-------|----------------------|--------|-------------------|--------|-------|-----------------------|
|            |       | (mm)                 | (inch) | (mm)              | (inch) |       |                       |
| OD         | (Max) | 9.65                 | 0.380  | 10.29             | 0.405  | Black | Box Qty<br>= 8,000pcs |
| ID         | (min) | 4.78                 | 0.188  | 4.27              | 0.168  |       |                       |
| HT         | (max) | 3.96                 | 0.156  | 4.57              | 0.180  |       |                       |

### Physical Characteristics

| Cross Section<br>(A)    | Path Length<br>( $\ell$ ) | Window Area<br>(Wa)  | Volume<br>(V)          | Breakdown Voltage<br>(Vac) |
|-------------------------|---------------------------|----------------------|------------------------|----------------------------|
| 0.095 cm <sup>2</sup>   | 2.18 cm                   | 0.14 cm <sup>2</sup> | 0.2060 cm <sup>3</sup> | 1,000                      |
| 0.01465 in <sup>2</sup> | 0.858 in                  | 28,202 cmil          | 0.0126 in <sup>3</sup> |                            |

### Winding Information

|                                                       |      |      |
|-------------------------------------------------------|------|------|
| 0% Winding length/turn<br>(cm)                        |      |      |
| 1.516                                                 |      |      |
| 40% winding factor<br>Surface Area (cm <sup>2</sup> ) |      |      |
| 4.47                                                  |      |      |
| 40% Wound Di.(mm)                                     |      |      |
| OD                                                    | ID   | HT   |
| 11.32                                                 | 2.79 | 5.83 |

### Typical DC Bias Performance

