


FM1027060G

Electrical Characteristics

Material	Permeability (μ)	AL $\pm$ 8% (nH/N ²)	DCB (% min) @ 50 Oe	Coreloss (mW/cm ³ , max) @50kHz, 100G
FluxMax	60	184	86.00	3.2

OD : 1027G

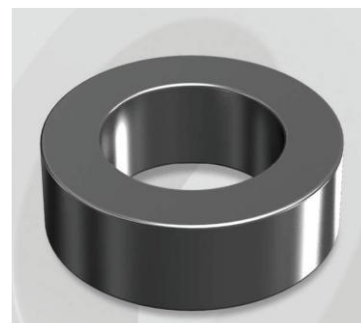

Core Dimensions

Dimensions		Uncoated (Before)		Coated (After)		Color	Packaging
		(mm)	(inch)	(mm)	(inch)		
OD	(Max)	101.60	4.000	103.10	4.059	Black	Box Qty = 8pcs
ID	(min)	57.20	2.252	55.70	2.193		
HT	(max)	27.20	1.071	28.50	1.122		

Physical Characteristics

Cross Section (A)	Path Length (ℓ)	Window Area (Wa)	Volume (V)	Breakdown Voltage (Vac)
5.944 cm ²	24.27 cm	24.37 cm ²	144.2609 cm ³	1,000
0.92132 in ²	9.555 in	4,808,939 cmil	8.8028 in ³	

Winding Information

0% Winding length/turn (cm)		
10.440		
40% winding factor Surface Area (cm ²)		
410.93		
40% Wound Di.(mm)		
OD	ID	HT
116.93	36.46	45.04

Typical DC Bias Performance

