


FM508026G

Electrical Characteristics

Material	Permeability (μ)	AL $\pm$ 8% (nH/N ²)	DCB (% min) @ 200 Oe	Coreloss (mW/cm ³ , max) @50kHz, 300G
FluxMax	26	32	78.26	37

OD : 508G

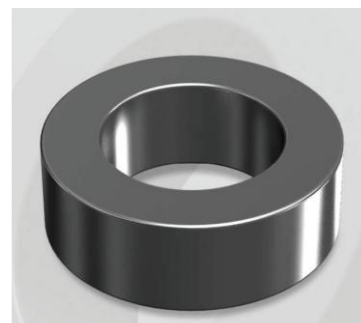

Core Dimensions

Dimensions		Uncoated (Before)		Coated (After)		Color	Packaging
		(mm)	(inch)	(mm)	(inch)		
OD	(Max)	50.80	2.000	51.70	2.035	Black	Box Qty = 96pcs
ID	(min)	31.75	1.250	30.90	1.217		
HT	(max)	13.46	0.530	14.35	0.565		

Physical Characteristics

Cross Section (A)	Path Length (ℓ)	Window Area (Wa)	Volume (V)	Breakdown Voltage (Vac)
1.250 cm ²	12.73 cm	7.50 cm ²	15.9125 cm ³	1,000
0.19375 in ²	5.012 in	1,480,166 cmil	0.9710 in ³	

Winding Information

0% Winding length/turn (cm)		
4.950		
40% winding factor Surface Area (cm ²)		
108.52		
40% Wound Di.(mm)		
OD	ID	HT
59.57	20.23	23.62

Typical DC Bias Performance

