


FM777026G

Electrical Characteristics

Material	Permeability (μ)	AL $\pm$ 8% (nH/N ²)	DCB (% min) @ 200 Oe	Coreloss (mW/cm ³ , max) @50kHz, 100G
FluxMax	26	30	78.26	3.4

OD : 777G

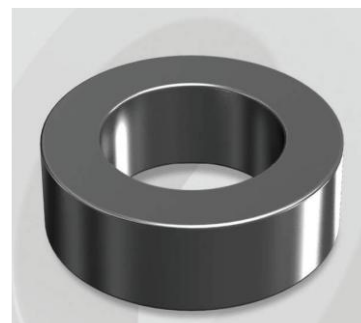

Core Dimensions

Dimensions		Uncoated (Before)		Coated (After)		Color	Packaging
		(mm)	(inch)	(mm)	(inch)		
OD	(Max)	77.80	3.063	78.90	3.106	Black	Box Qty = 40pcs
ID	(min)	49.23	1.938	48.00	1.890		
HT	(max)	12.70	0.500	13.97	0.550		

Physical Characteristics

Cross Section (A)	Path Length (ℓ)	Window Area (Wa)	Volume (V)	Breakdown Voltage (Vac)
1.770 cm ²	20.00 cm	17.99 cm ²	35.4000 cm ³	1,000
0.27435 in ²	7.874 in	3,550,424 cmil	2.1601 in ³	

Winding Information

0% Winding length/turn (cm)		
5.884		
40% winding factor Surface Area (cm ²)		
224.42		
40% Wound Di.(mm)		
OD	ID	HT
91.14	31.33	28.42

Typical DC Bias Performance

